




Rotating eyebolt APAS




- Surub rotativ de ridicare cu inel, reglabil sub sarcina – APAS / Grad 10
- Punct de prindere cu fixare prin insurubare.
- Punct de prindere pentru ridicarea sarcinilor
- Factor de siguranta 4 in toate directiile de tractiune
- Proiectat, testat si certificat in conformitate cu directivele tehnice GS-MO 1504 – EN 1677
- Potrivit pentru ridicarea în condiții de siguranță, în conformitate cu Directiva Mașini 2006/42/CE
- Poate fi oriatat la 360°
- Testat la 100% magnaflux
- Testat la 20.000 cicluri
- Ideal pentru fixare la 90°
- Surub prizonier
- La tragerea axiala poate fi o variatie de + / -5 ° cu o scadere de 10% a capacitatii

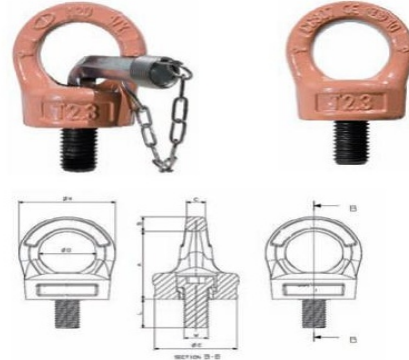

DATE TEHNICE

Anchorage point for load lifting.

- Safety coefficient 4 in all loading directions
- Designed, tested and certified in compliance with the technical directives GS-MO 1504 – EN 1677
- Suitable for safe lifting in compliance with the machinery directive 2006/42/EC
- Can be oriented at 360°
- Tested at 100 % magnaflux
- Tested at 20.000 stress cycles
- Ideal for fastening at 90°
- Captive screws
- On the axial pull there can be variation of +/-5° with a 10% decrease in capacity



(Position which is in compliance with the safety coefficient 4 as per the related technical directives)

Do not exceed during rotation phase loads 50 rpm

Pozitie care este in conformitate cu coeficientul de siguranta 4 cat si cu directivele tehnice asociate

Atentie: Acest dispozitiv nu este potrivit pentru rotire in timpul ridicarii

Maße / Measurements

Artikel ohne Schlüssel Article without key	Artikel mit Schlüssel Article with key	Abmessung DxL Size DxL	M-WLL	A	B	C	D	E	K	L	Gewicht ca. kg Weight approx.
31708021	31708021S	M 8	0,30	44,5	8	10,0	29	32	45	12	0,300
31710021	31710021S	M 10	0,40	44,5	8	10,0	29	32	45	16	0,300
31712021	31712021S	M 12	0,75	53,5	11	11,0	34	44	56	18	0,460
31716021	31716021S	M 16	1,50	56,5	13	14,5	39	56	65	24	0,900
31720021	31720021S	M 20	2,50	67,0	14	17,0	42	58	70	30	1,150
31724021	31724021S	M 24	3,20	80,0	18	19,0	52	73	88	36	2,050
31730021	31730021S	M 30	4,50	101,0	22	27,0	62	80	106	43	4,000
31736021	31736021S	M 36	7,00	125,0	37	38,0	80	95	154	54	6,700
31742021	31742021S	M 42	9,00	148,0	40	41,0	90	105	170	64	9,500
31748021	31748021S	M 48	12,00	165,0	45	47,0	95	120	185	72	13,400

Tragfähigkeiten / WLLs



Artikel ohne Schlüssel Article without key	Artikel mit Schlüssel Article with key	Abmessung D x L Size D x L	0° 1Strang Single leg	0° 2Stränge 2 legs	90° 1Strang Single leg	90° 2Stränge 2 legs	0°-45°	45°-60° 2Stränge 2 legs	Asym.	0°-45°	45°-60° 4Stränge 4 legs	Asym.	Drehmoment Tightening couple Nm
31708021	31708021S	M 8	1	2	0,30	0,6	0,42	0,30	0,30	0,63	0,45	0,30	8
31710021	31710021S	M 10	1	2	0,40	0,8	0,56	0,40	0,40	0,84	0,60	0,40	16
31712021	31712021S	M 12	2	4	0,75	1,5	1,00	0,75	0,75	1,60	1,12	0,75	28
31716021	31716021S	M 16	4	8	1,50	3,0	2,00	1,50	1,50	3,15	2,25	1,50	70
31720021	31720021S	M 20	6	12	2,30	4,6	3,22	2,30	2,30	4,83	3,45	2,30	135
31724021	31724021S	M 24	8	16	3,20	6,4	4,48	3,20	3,20	6,70	4,80	3,20	230
31730021	31730021S	M 30	12	24	4,50	9,0	6,30	4,50	4,50	9,40	6,70	4,50	465
31736021	31736021S	M 36	16	32	7,00	14,0	9,80	7,00	7,00	14,70	10,50	7,00	814
31742021	31742021S	M 42	24	45	9,00	18,0	12,60	9,00	9,00	18,90	13,50	9,00	1304
31748021	31748021S	M 48	32	64	12,00	24,0	16,80	12,00	12,00	25,20	18,00	12,00	1981

Cheie speciala pentru marimi intre M8 si M30



Special key for sizes from M8 to M30

Artikel Article	Abmessung Size
317S08AS	M 8
317S10AS	M 10
317S12AS	M 12
317S16AS	M 16
317S20AS	M 20
317S24AS	M 24
317S30AS	M 30

Total Race Impex SRL J40/20761/2006 , RO 19794573 , Bucuresti, sector 6 , Bulevardul Uverturii , nr.69A, cod:060933 Mobil:0728305610/ 0728305611 / 0728305612; fax: 0214301206;tel/fax :0314201202 E-mail:info@totalrace.ro;vanzari@totalrace.ro
 Website:www.totalrace.ro , www.lanturideridicare.ro , www.chingimacarale.ro , www.benziambalare.ro , www.banadaancorare.rowww.lanturichingi.ro , www.carligemacarale.ro ,
 www.echipamentemacara.ro , www.benebeton.ro , www.clestiridicare.ro .

